




# PLASTICENTER, MAQUINARIA PARA RECICLAR, PELETIZADORA DE CASCADA

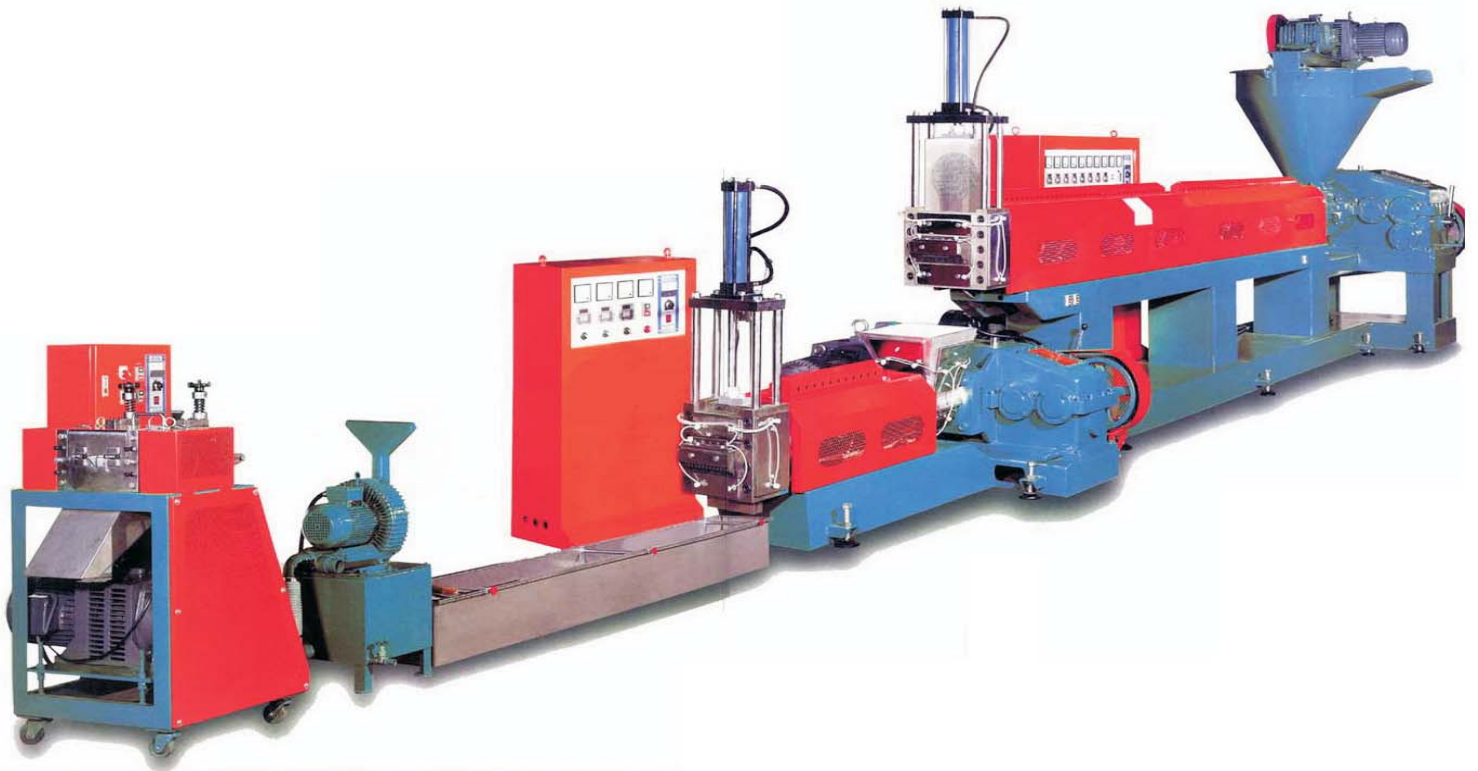



MODEL	WN-75E	WN-90E	WN-100E	WN-120E
EXTRUSION OUTPUT	75-125 KGS / HR	100-160 KGS / HR	120-200 KGS / HR	180-300 KGS / HR
SCREW DIA	75 m / m	90 m / m	100 m / m	120 m / m
SCREW L / D	32 / 1	32 / 1	32 / 1	32 / 1
DRIVING MOTOR	30 HP	40 HP	50 HP	75 HP
AUTO-THERMO CONTROLLER	4 ZONES	5 ZONES	6 ZONES	7 ZONES
HEATER CAPACITY	25 KW	30 KW	35 KW	52 KW
SPEED TAKE-UP	2	2	2	2
FORCED FEEDING MOTOR	3 HP V.S.	3 HP V.S.	3 HP V.S.	5 HP V.S.
HYDRAULIC SCREEN CHANGE MOTOR	2 HP	3 HP	3 HP	3 HP
SCREW DIA	75 M / M	90 M / M	100 M / M	120 M / M
SCREW L / D	10 / 1	10 / 1	10 / 1	10 / 1
DRIVING MOTOR	7-½ HPV.S	10 HPV.S	15 HPV.S	25 HPV.S
AUTO-THERMO CONTROLLER	2 ZONES	2 ZONES	3 ZONES	3 ZONES
HEATER CAPACITY	7 KW	8 KW	12 KW	15 KW
WATER COOLING TANK	1 UNIT	1 UNIT	1 UNIT	1 UNIT
WATER WIND MILL	1 HP	2 HP	2 HP	3 HP
DRIVING MOTOR	2 HP V.S.	2 HP V.S.	3 HP V.S.	5 HP V.S.
MACHINE WEIGHT	2200 KGS	2600 KGS	3200 KGS	4500 KGS
PACKING SIZE (LxWxH)	3.5 Mx1.7Mx1.3M	3.8 Mx1.8Mx1.3M	4.3 Mx2Mx1.5M	5Mx2.2Mx1.5M

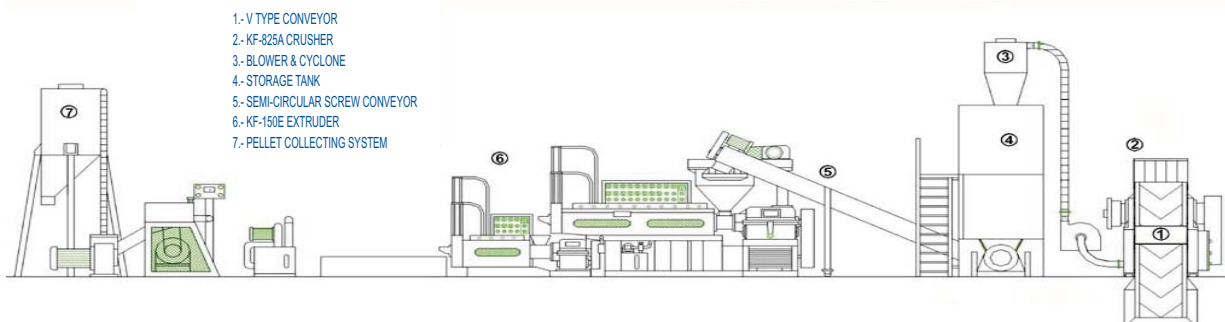

# PLASTICENTER, MAQUINARIA PARA RECICLAR, PELETIZADORA CORTE A LA CABEZA

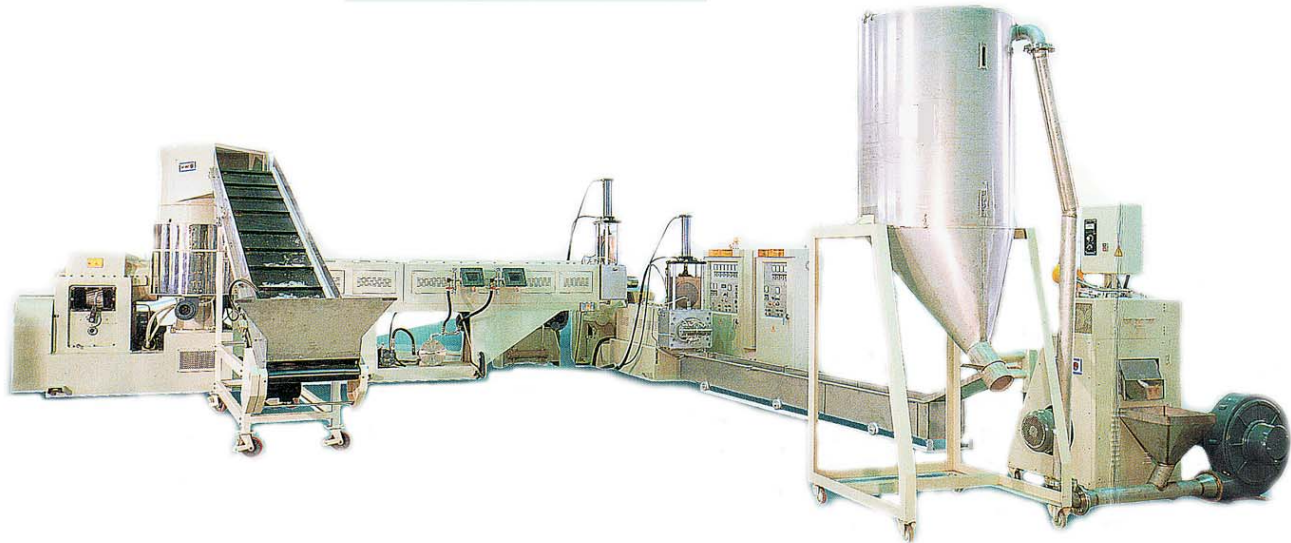


MODEL	UNVENTED			VENTED		
	WIN HNV-85	WIN HNV-100	WIN HNV-100	WIN HNV-85V	WIN HNV-100V	WIN HNV-120V
EXTRUSION OUTPUT	150-200 KG/HR	200350 KG/HR	300-500 KG/HR	150-200 KG/HR	200-350 KG/HR	300-500 KG/HR
GEAR BOXDRIVING MOTOR	2 SPEED RANGE					
SCREW DIA. MM	85	100	120/145	85	100	120/145
SCREW L/D RATIO	16/1	16/1	16/1	30/1	30/1	30/1
DRIVING MOTOR	50HP AC	75HP AC	100HP AC	60HP AC	100HP AC	125HP AC
BARREL COOLING ZONE	2	3	4	4	6	8
BARREL HEATER CAPACITY	16 KW	24 KW	32 KW	32 KW	48 KW	64 KW
BARREL THERMOCOUPLE	2	3	4	4	6	8
ADAPTER HEATER CAPACITY	2.8 KW	3.2 KW	3.5 KW	2.8 KW	3.2 KW	3.5 KW
SHREDDING ROTARY CUTTER	4 PCS	4 PCS	4 PCS	4 PCS	4 PCS	4 PCS
SHREDDING SATIONARY CUTTER	6 PCS	6 PCS	6 PCS	6 PCS	6 PCS	6 PCS
SHREDDING DRIVING MOTOR	40 HP	60 HP	75 HP	40 HP	60 HP	75 HP
SHREDDING HEATER CAPACITY	6 KW	8 KW	10 KW	6 KW	9 KW	10 KW
CONVEYOR DRIVING MOTOR	1/2 HP	1/2 HP	1 HP	1/2 HP	1/2 HP	1/1 HP
SCREEN CHANGER FILTER DIA (mm)	170	200	230	170	200	230
SCREEN CHANGER HYDRAULIC DRIVING MOTOR	3 HP	3 HP	5 HP	3 HP	5 HP	7-1/2 HP
DIE HEAD CUTTING DEVICE HEATER CAPACITY	4 KW	5 KW	6 KW	4 KW	5 KW	6 KW
DIE HEAD CUTTING DEVICE DIA HEATER CAPACITY	2 KW	3 KW	3 KW	2 KW	3 KW	3KW
DIE HEAD CUTTING DEVICE PELLETIZING MOTOR	2HP INVERTER CONTROL					
DIE HEAD CUTTING DEVICE COOLING WATER PUMP	2 HP	3 HP	3 HP	2 HP	3 HP	3 HP
VIBRATION MOTOR	HP X 2PCS					
BLOWER MOTOR	3 HP	5 HP	5 HP	3 HP	5 HP	5 HP
BLOWER CAPACITY	300 KG/HR	500 KG/HR	500 KG/HR	300 KG/HR	500 KG/HR	500 KG/HR

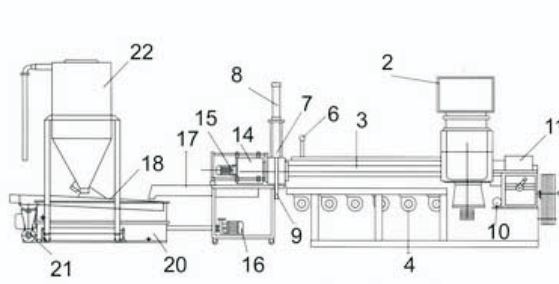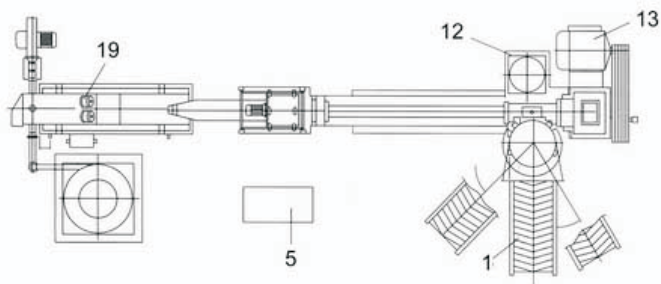

- 1- CONVEYOR
- 2- SHREDDING DRUM
- 3- SCREW & BARREL
- 4- COOLING FAN
- 5- CONTROL PANEL
- 6- PREASURE GAUGE
- 7- DIE HEAD
- 8- HIDRAULIC CYLINDER
- 9- SCREEN CHANGER
- 10- COOLER FOR GEAR BOX
- 11- GEAR BOX
- 12- SHREDDING MOTOR
- 13- EXTRUDER MOTOR
- 14- WATER COOLING JACKET
- 15- PELLETIZING MOTOR
- 16- WATER PUMP
- 17- COOLING TANK
- 18- VIBRATING SCREEN
- 19- VIBRATING MOTOR
- 20- CIRCULATION WATER TANK
- 21- POWERFULL BLOWER
- 22- STORAGE TANK

# PLASTICENTER, MAQUINARIA PARA RECICLAR, PELETIZADORA LINEAS ESPECIALES

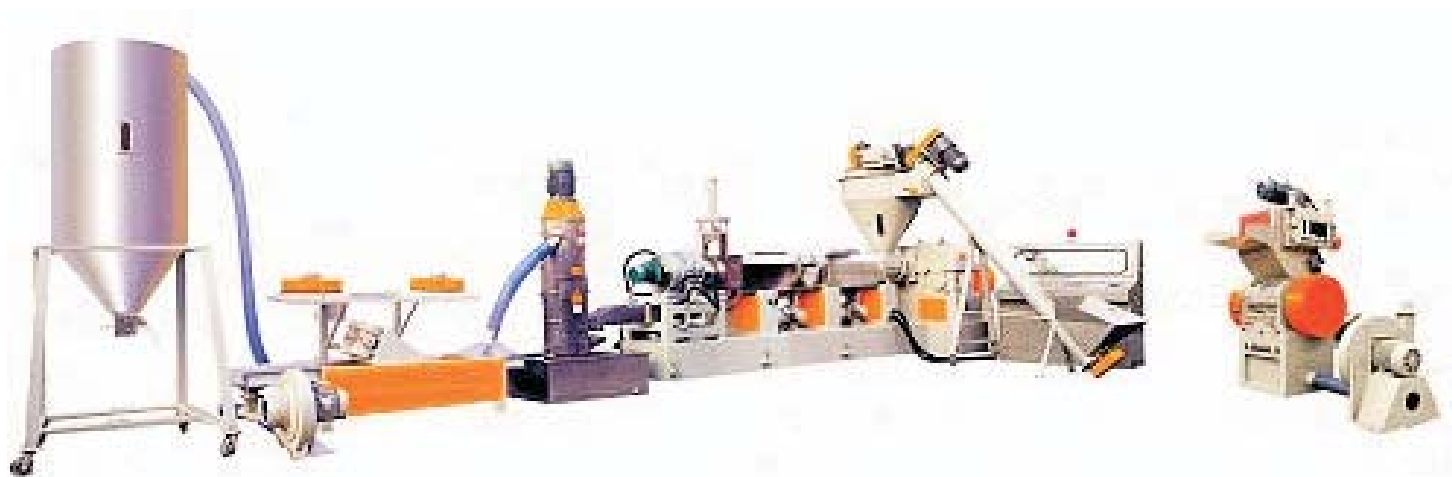

MODEL	GRANULATOR		BLOWER	SCREW CONVEYOR		BLENDING TANK			MAIN EXTRUDER			
	MODEL	POWER	POWER	POWER	SIZE	CAPACITY	POWER	L / RATIO	MAIN POWER	TEMP. CONTROL	HEATING CAPACITY	HYD. POWER OF DIE-EXCHANG
WIN-90FDC	SM-A15	15 HP	3 HP	3 HP	8' ø X 3.2 M	1310 L	3 HP	28: 1	30 HP AC	5 ZONES	30 KW	3 HP
WIN-100FDC	SM-A15	15 HP	3 HP	3 HP	8' ø X 3.2 M	1310 L	3 HP	28: 1	40 HP AC	6 ZONES	40 KW	3 HP
WIN-120FDC	SM-A20	30 HP	5 HP	3 HP	8' ø X 3.2 M	2530 L	3 HP	30: 1	75 HP AC	8 ZONES	55 KW	3 HP
WIN-150FDC	SM-A25	40 HP	7.5 HP	3 HP	8' ø X 3.2 M	4685 L	3 HP	32: 1	100 HP AC	10 ZONES	70 KW	3 HP

